


BODO T

Single-outlet with floor socket outlet, dry-cleaned, round

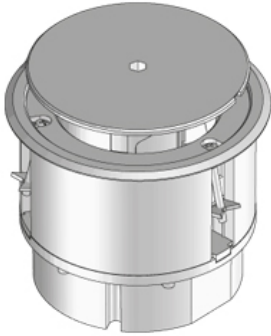

Round single-outlet made of plastic, equipped with an isolated ground receptacle and an empty space for data technology. With floor cover protection frame including a pivotable cover with cable outlet, mounting box with strain relief and a set of claws. For the installation into screed and raised floor/hollow floor openings. Equipped with a isolated ground receptacle of 45x45mm and a RJ45 dummy data cover 22.5x45 mm. Suitable for rooms with dry-cleaned floor covers. Designed for office traffic loads.

Please mind the technical information in chapter planning.



material	Cover with cable outlet and frame, mounting box: polyamide
type of assembly	Fixing on floor box UBDHB / rough concrete floor and installation in screed or false floor
application area	dry floor cleaning
norm	according to DIN EN 50085
permits	according to VDE / TÜV
protection class	in use IP 20 / not in use IP 30
loading	including inspection stamp Ø 13 mm: 1.5 kN

Acrylonitrile-butadiene-styrene copolymer

Product	H	H _{min}	B	E	P _{max}	colour	IP _n	IP _g	G
BODO T-G	126 mm	102 mm	133 mm	122 mm	1.50 kN	RAL 7011 (iron grey)	IP 30	IP 20	0.40 kg
incl.:									
1x UAA-B 22 1x UST45-W 1 1x UARM-3-1 118 1x UG-R						cover, black shockproof socket single Cover plate for 3x UDÆE22 mounting box, round			
BODO T-S	126 mm	102 mm	133 mm	122 mm	1.50 kN	RAL 9011 (graphite black)	IP 30	IP 20	0.40 kg
incl.:									
1x UAA-B 22 1x UST45-W 1 1x UARM-3-1 118 1x UG-R						cover, black shockproof socket single Cover plate for 3x UDÆE22 mounting box, round			



H : height

H_{min} : Minimum installation height

B : width

E : fitting dimension

P_{max} : Maximum load


colour :

IP_n : IP protection level in unused condition

IP_g : IP protection level in used condition

G : weight

DETAILS / APPLICATIONS

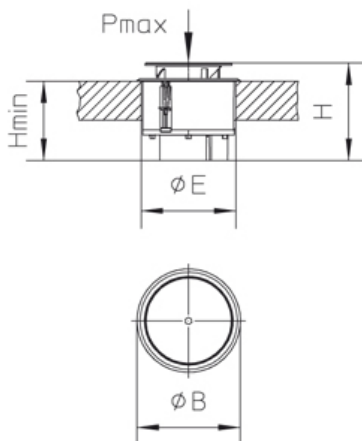

OPTIONAL ACCESSORIES

USK R122, UBDHB 122R, UWZ IS



dry-cleaned



Electrical and electronic equipment must not be disposed off via the household waste.

