


BODO N4

Single-outlet with floor socket outlet, wet-cleaned, round

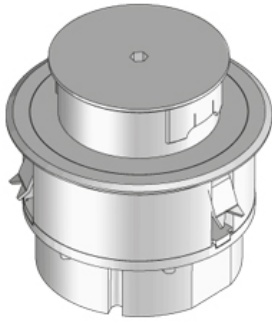

Round single outlet with floor cover protection frame. Including pivotable tube as cable outlet, cover, mounting box with strain-relief, claw set and rubber seal. For installation in floor sockets and raised or hollow space floor openings. Equipped with a double isolated ground receptacle. Suitable for rooms with dry and wet-cleaned floor covers. Designed for high traffic loads.

Please mind the technical information in chapter planning.



material	Tube, cover and tube collet: aluminium or stainless steel / frame and mounting box: plastic material
type of assembly	Fixing on floor box UBDHB / rough concrete floor and installation in screed or false floor
application area	wet floor cleaning
norm	according to DIN EN 50085
permits	according to VDE / TÜV
protection class	in use IP 22 / in use with rubber sleeve UGM1-3 IP 43 / not in use IP 66
loading	including inspection stamp Ø 130 mm: 15 kN

Aluminium

Product	H	H _{min}	B	E	P _{max}	colour	IP _n	IP _g	G
BODO N4	122 mm	87 mm	140 mm	122 mm	15 kN	aluminum	IP 66	IP 43	0.74 kg
incl.:									
1x UET80-R-WD 1x UETD80-R-WD 1x UST45-W 2 1x UARM-4-1 118 1x UG-R 2x UGM1-3 1x UWZ-IS 8				tube tube cover shockproof socket, duplex Cover plate for 4x UDAE22 mounting box, round rubber sleeve Allen wrench					
BODO N4-SW	122 mm	87 mm	140 mm	122 mm	15 kN	black	IP 66	IP 43	0.74 kg
incl.:									
1x UET80-R-WD 1x UETD80-R-WD 1x UST45-W 2 1x UARM-4-1 118 1x UG-R 2x UGM1-3 1x UWZ-IS 8				tube tube cover shockproof socket, duplex Cover plate for 4x UDAE22 mounting box, round rubber sleeve Allen wrench					





Product	H	H _{min}	B	E	P _{max}	colour	IP _n	IP _g	G
BODO N4-CR	122 mm	87 mm	140 mm	122 mm	15 kN	chrome	IP 66	IP 43	0.74 kg
incl.:									
1x UET80-R-WD 1x UETD80-R-WD 1x UST45-W 2 1x UARM-4-1 118 1x UG-R 2x UGM1-3 1x UWZ-IS 8				tube tube cover shockproof socket, duplex Cover plate for 4x UDAE22 mounting box, round rubber sleeve Allen wrench					

Brass

Product	H	H _{min}	B	E	P _{max}	colour	IP _n	IP _g	G
BODO N4-MMS	122 mm	87 mm	140 mm	122 mm	15 kN	brass, solid	IP 66	IP 43	1.51 kg
incl.:									
1x UET80-R-WD 1x UETD80-R-WD 1x UST45-W 2 1x UARM-4-1 118 1x UG-R 2x UGM1-3 1x UWZ-IS 8				tube tube cover shockproof socket, duplex Cover plate for 4x UDAE22 mounting box, round rubber sleeve Allen wrench					

Stainless steel, according to ASTM 304 / BS 304 S 3

Product	H	H _{min}	B	E	P _{max}	colour	IP _n	IP _g	G
BODO N4-E	122 mm	87 mm	140 mm	122 mm	15 kN	Stainless steel, solid	IP 66	IP 43	1.50 kg
incl.:									
1x UET80-R-WD 1x UETD80-R-WD 1x UST45-W 2 1x UARM-4-1 118 1x UG-R 2x UGM1-3 1x UWZ-IS 8				tube tube cover shockproof socket, duplex Cover plate for 4x UDAE22 mounting box, round rubber sleeve Allen wrench					

H : height

H_{min} : Minimum installation height

B : width

E : fitting dimension

P_{max} : Maximum load

colour :


IP_n : IP protection level in unused condition

IP_g : IP protection level in used condition

G : weight



DETAILS / APPLICATIONS

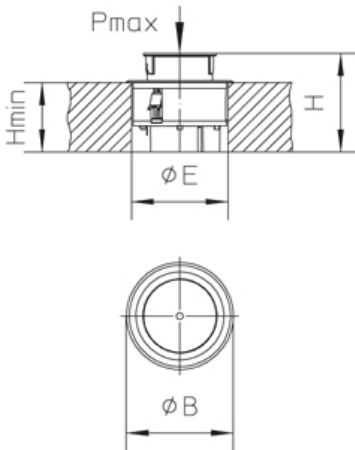

OPTIONAL ACCESSORIES

USK R122, UBDHB 122R



wet-cleaned



Electrical and electronic equipment must not be disposed off via the household waste.

